

Multimode solutions of an ideal plastic flow.

A.M. Grundland* and V. Lamothe†

2012-01-23

Abstract

This paper contains an analysis of multimode solutions expressible in terms of Riemann invariants obtained from complex characteristic elements. A variant of the conditional symmetry method for constructing this type of solution is proposed. Examples of applications of the proposed approach to a nonstationary irrotational ideal plastic flow in (2+1) dimensions are discussed in detail. Several new classes of solutions, some of them bounded, have been obtained in closed form. For a particular case of a stationary ideal plastic flow, extrusion dies have been drawn.

MSC: 35B06 · 35F50 · 35F20 · 75Cxx

keywords: conditional symmetries; Riemann invariants; multimode solution; ideal plasticity.

1 Introduction

Riemann waves represent a very important class of solution of nonlinear first-order systems of PDEs. They are ubiquitous in the differential equations of mathematical physics, since they appear in all multi-dimensional hyperbolic systems and constitute their elementary solutions. Their characteristic feature is that, in most cases, they are expressible only in implicit form. For a homogeneous hyperbolic quasilinear system of first-order PDEs,

$$A_{\alpha}^{i\mu}(u) \frac{\partial u^{\alpha}}{\partial x^i} = 0, \quad i = 1, \dots, p, \quad \alpha = 1, \dots, q, \quad \mu = 1, \dots, m, \quad (1)$$

(where $A^1, \dots, A^p$) are $q \times m$ matrix functions of an unknown function u . Here we adopt the convention that repeated indices are summed unless one of them is in a bracket.

A Riemann wave solution is defined by the equation $u = f(r(x, u))$, where $f : \mathbb{R} \rightarrow \mathbb{R}^q$ and the function $r(x, u) = \lambda_i(u)x^i$ is called the Riemann invariant of the vector λ satisfying the equation $\ker(\lambda_i A^i(u)) \neq 0$. These solutions have rank at most equal to one. They are building blocks for constructing more general types of solutions describing nonlinear superpositions of many waves (k -waves), which are very interesting from the physical point of view. Until now, the only way to approach this task was through the generalized method of characteristics (GMC) [3, 7, 21, 22, 29, 30] and more recently through the

*Centre de Recherche Mathématiques, Université du Montréal, C.P. 6128, Succ. Centre-ville, Montréal, (QC) H3C 3J7, Canada, and Département de mathématiques et informatiques, Université du Québec, Trois-Rivières, (QC) G9A 5H7, Canada, email:grundlan@crm.umontreal.ca

†Département de Mathématiques et Statistique, Université de Montréal, C.P. 6128, Succ. Centre-ville, Montréal, (QC) H3C 3J7, Canada, email:lamothe@crm.umontreal.ca

conditional symmetry method (CSM) [1, 6, 13, 15, 16, 28]. The GMC relies on treating Riemann invariants as new dependent variables (which remain constant along the appropriate characteristic curves of the initial system (1) and constitute a set of invariants of the Abelian algebra of some vector field $X_a = \xi_a^i(u)\partial_x^i$ with $\lambda_i^a \xi_a^i = 0$ for $1 \leq a \leq k < p$. This leads to the reduction of the dimension of the problem. The most important theoretical results obtained with the use of the GMC or CSM [16] include the finding of necessary and sufficient conditions for the existence of Riemann k -waves in multidimensional systems. It was shown [29] that these solutions depend on k arbitrary functions of one variable. Some criteria were also found [29] for determining the elastic or nonelastic character of the superposition between Riemann waves described by hyperbolic systems, which is particularly useful in physical applications. In applications to fluid dynamics and nonlinear field theory, many new and interesting results were obtained [2, 3, 10, 11, 12, 22, 26, 30, 32, 33]. Both the GMC and CSM methods, like all other techniques for solving PDEs, have their limitations. This fact has motivated the authors to search for the means of constructing larger classes of multiple wave solutions expressible in terms of Riemann invariants by allowing the introduction of complex integral elements in the place of real simple integral elements (with which the solutions of hyperbolic systems are built [29]). This idea originated from the work of S. Sobolev [31] in which he solved the wave equation by using the associated complex wave vectors. We are particularly interested in the construction of nonlinear superpositions of elementary rank $-k$ solutions (modes) and the proposed analysis indicates that the language of conditional symmetries is an effective tool for this purpose. This approach is applied to the nonstationary irrotational flow of an ideal plastic material in its elliptic region.

The organization of this paper is as follows. Section 2 contains a detailed account of the generalized method of characteristics for first-order quasilinear systems of PDEs in many dimensions based on complex characteristic elements. In section 3 we formulate the problem of multimode solutions expressible in terms of Riemann invariants by means of a group theoretical approach. This allows us to formulate the necessary and sufficient conditions for constructing these types of solutions. Section 4 presents an application of the developed approach to the system of equations describing a nonstationary irrotational flow of ideal plastic materials in (2+1) dimensions. Several new classes of solutions are obtained in closed form. We obtain several bounded solutions. For the stationary case, limiting ourselves to the region where the gradient catastrophe does not occur, we have drawn extrusion dies and the flow inside the tools. Section 5 summarizes the obtained results and contains some suggestions regarding some further developments.

2 Complex characteristic elements.

The methodological approach assumed in this section is based on the generalized method of characteristics which has been extensively developed (*e.g.* in [3, 9, 14, 17, 29] and references therein) for multidimensional homogeneous and nonhomogeneous hyperbolic systems of first-order PDEs. A specific feature of that approach is an algebraic and geometric point of view. An algebraization of systems of PDEs was made possible by representing the general integral elements as linear combinations of some special elements associated with those vector fields which generate characteristic curves in the spaces of independent variables X and dependent variables U , respectively. The introduction of these elements (called simple integral elements) proved to be very useful for constructing certain classes of rank- k solutions in closed form. These integral elements proved to correspond to Riemann wave solutions in the case of nonelliptic systems and serve to construct multiple waves (k -waves) as a superposition of several single Riemann waves.

The generalized method of characteristics for solving quasilinear hyperbolic first-order systems of can be extended to the case of complex characteristic elements [29]. These elements were introduced not only for elliptic systems but also for hyperbolic systems by allowing the wave vectors to be the complex solutions of the dispersion relation associated with the initial system of equations.

The starting point is to make an algebraization, according to [3, 14, 29], of a first-order system of PDEs (1) in p independent and q dependent variables written in its matrix form

$$\begin{aligned} A^i(u)u_i &= 0, \quad i = 1, \dots, p, \\ x &= (x^1, \dots, x^p) \in X \subseteq \mathbb{R}^p, \quad u = (u^1, \dots, u^q) \in U \subseteq \mathbb{R}^q, \end{aligned} \quad (2)$$

where $A^1, \dots, A^p$ are $m \times q$ matrix functions of u and we denote the partial derivatives by $u_i^\alpha = \partial u^\alpha / \partial x^i$. The matrix L_i^α satisfying the conditions

$$u_i^\alpha \in \{L_i^\alpha : A_i^\alpha L_i^\alpha = 0, \quad s = 1, \dots, q\}$$

at some open given point $u_0 \in U$ is called an integral element of the system (2). This matrix $L = (\partial u^\alpha / \partial x^i)$ is a matrix of the tangent mapping $du : X \rightarrow T_u U$ given by the formula

$$X \ni (\delta x^i) \rightarrow (\delta u^\alpha) \in T_u U, \quad \text{where } \delta u^\alpha = u_i^\alpha \delta x^i.$$

The tangent mapping $du(x)$ determines an element of linear space $L(X, T_u U)$, which can be identified with the tensor product $T_u U \otimes X^*$, (where X^* is the dual space of X , *i.e.* the space of linear forms). It is well known [3, 14, 29] that each element of this tensor product can be represented as a finite sum of simple tensors of the form

$$L = \gamma \otimes \lambda,$$

where $\lambda \in X^*$ is a covector and $\gamma = \gamma^\alpha \frac{\partial}{\partial u^\alpha} \in T_u U$ is a tangent vector at the point $u \in U$. Hence, the integral element L_i^α is called a simple element if $\text{rank}(L_i^\alpha) = 1$. To determine a simple integral element L_i^α we have to find a vector field $\gamma \in T_u U$ and a covector $\lambda \in X^*$ satisfying the so-called wave relation

$$(\lambda_i A^i(u)) \gamma^\alpha = 0. \quad (3)$$

The necessary and sufficient condition for the existence of a nonzero solution γ for the equation (3) is

$$\text{rank}(\lambda_i A^i(u)) < \min(m, q). \quad (4)$$

This relation is known as the dispersion relation. If the covector $\lambda = \lambda_i(u) dx^i$ satisfies the dispersion relation (4) then there exists a polarization vector $\gamma \in T_u U$ satisfying the wave relation (3). The algebraic approach which has been used in [3, 14, 29] for hyperbolic systems of equations (2) allows the construction of certain classes of k -wave solutions admitting k arbitrary functions of one variable. The replacement of the simple real element L_i^α by the matrix of derivatives u_i^α in the system of equations (2) allows us to construct more general classes of solutions by replacing the real elements with complex ones. A specific form of solution $u(x)$ of (2) is postulated for which the tangent mapping $du(x)$ is a sum of a complex element and its complex conjugate

$$du^\alpha(x) = \xi(x) \gamma^\alpha(u) \lambda_i(u) dx^i + \bar{\xi}(x) \bar{\gamma}^\alpha(u) \bar{\lambda}_i(u) dx^i, \quad (5)$$

where $\gamma = (\gamma^1, \dots, \gamma^q) \in \mathbb{C}^q$ and $\lambda = (\lambda_1, \dots, \lambda_p) \in \mathbb{C}^p$ satisfy

$$\lambda_i A_\alpha^{is}(u) \gamma^\alpha = 0, \quad \bar{\lambda}_i A_\alpha^{is}(u) \bar{\gamma}^\alpha = 0.$$

Here the quantity $\xi(x) \neq 0$ is treated as a complex function of the real variables x . In what follows we assume that the vectors γ and $\bar{\gamma}$ are linearly independent. The proposed form of solution (5) is more general than the one proposed in [18, 29] for which the derivatives u_i^α are represented by a real simple element leading to a simple Riemann wave solution. To distinguish this situation with the one proposed in (5), we call the solution associated with a complex element and its complex conjugate a simple mode solution. Similarly, as in the case of k -waves [29], we have to find the necessary and sufficient conditions for the existence of solutions of type (5). These conditions are called involutivity conditions.

First we derive a number of necessary conditions on the vector fields (γ, λ) and their complex conjugate $(\bar{\gamma}, \bar{\lambda})$ as a requirement for the existence of rank-2 (simple mode) solutions of the original system (2). Namely, closing (5) by exterior differentiation, we obtain the following 2-forms

$$\gamma^\alpha (d\xi \wedge \lambda + \xi d\lambda) + \xi d\gamma \wedge \lambda + \bar{\gamma}^\alpha (d\bar{\xi} \wedge \bar{\lambda} + \bar{\xi} d\bar{\lambda}) + \bar{\xi} d\bar{\gamma} \wedge \bar{\lambda} = 0 \quad (6)$$

which have to satisfy (5). Using (5) we get

$$d\lambda = \xi \bar{\lambda} \wedge \lambda_{,\bar{\gamma}} + \xi \lambda \wedge \bar{\lambda}_{,\gamma}, \quad d\gamma = \bar{\xi} \gamma_{,\bar{\gamma}} \otimes \bar{\lambda} + \gamma_{,\lambda} \otimes d\lambda, \quad (7)$$

where we have used the following notation

$$\lambda_{,\gamma} = \gamma^\alpha \frac{\partial}{\partial u^\alpha} \lambda, \quad \gamma_{,\bar{\gamma}} = \bar{\gamma}^\alpha \frac{\partial}{\partial u^\alpha} \gamma.$$

Substituting (7) into the prolonged system (6) we obtain

$$\gamma \otimes [d\xi \wedge \lambda + \xi \bar{\lambda} \wedge \lambda_{,\bar{\gamma}}] + \bar{\gamma} \otimes [d\bar{\xi} \wedge \bar{\lambda} + \xi \bar{\xi} \lambda \wedge \bar{\lambda}_{,\gamma}] + \xi \bar{\xi} [\gamma, \bar{\gamma}] \otimes \lambda \wedge \bar{\lambda} = 0, \quad (8)$$

whenever the differential (5) holds. The commutator of vector fields γ and $\bar{\gamma}$, is denoted by

$$[\gamma, \bar{\gamma}] = (\gamma, \bar{\gamma})_u + \gamma_{,\lambda_i} \lambda_{i,\bar{\gamma}} - \bar{\gamma}_{,\lambda_i} \lambda_{i,\gamma},$$

while by $(\gamma, \bar{\gamma})_u$ we denote a part of the commutator which contains the differentiation with respect to the variables u^α , *i.e.*

$$(\gamma, \bar{\gamma})_u = \bar{\gamma}^\alpha \frac{\partial}{\partial u^\alpha} \gamma(u, \lambda)|_{\lambda=const.} - \gamma^\alpha \frac{\partial}{\partial u^\alpha} \bar{\gamma}(u, \bar{\lambda})|_{\bar{\lambda}=const.}.$$

Let Φ be an annihilator of the vectors γ and $\bar{\gamma}$, *i.e.*

$$\langle \omega \lrcorner \gamma \rangle = 0, \quad \langle \omega \lrcorner \bar{\gamma} \rangle = 0, \quad \omega \in \Phi = \text{An} \{ \gamma, \bar{\gamma} \}.$$

Here, by the parenthesis $\langle \omega \lrcorner \gamma \rangle$, we denote the contraction of the 1-form $\omega \in T_u^* U$ with the vector field $\gamma \in T_u U$ and similarly for the vector field $\bar{\gamma} \in T_u U$. Multiplying the equations (8) by the 1-form $\omega \in \Phi$ we get

$$\xi \bar{\xi} \langle \omega \lrcorner [\gamma, \bar{\gamma}] \rangle \wedge \lambda \wedge \bar{\lambda} = 0. \quad (9)$$

We look for the compatibility condition for which the system (9) does not provide any algebraic constraints on the coefficients ξ and $\bar{\xi}$. This postulate means that the profile of the simple modes associated with $\gamma \otimes \lambda$ and $\bar{\gamma} \otimes \bar{\lambda}$ can be chosen in an arbitrary way for the initial (or boundary) conditions. It follows from (9) that the commutator of the vector fields γ and $\bar{\gamma}$ is a linear combination of γ and $\bar{\gamma}$, where the coefficients are not necessarily constant, *i.e.*

$$[\gamma, \bar{\gamma}] \in \text{span} \{ \gamma, \bar{\gamma} \}.$$

So, the Frobenius theorem is satisfied. That is, at every point u_0 of the space of dependent variables U , there exists a tangent surface S spanned by the vector fields γ and $\bar{\gamma}$ passing through the point $u_0 \in U$. Moreover the above condition implies that there exists a complex-valued function α such that

$$[\gamma, \bar{\gamma}] = \alpha\gamma - \bar{\alpha}\bar{\gamma}, \quad (10)$$

since

$$\overline{[\gamma, \bar{\gamma}]} = [\bar{\gamma}, \gamma] = -[\gamma, \bar{\gamma}]$$

holds.

Next, from the vector fields γ and $\bar{\gamma}$ defined on U -space, we can construct the coframe Ψ , that is the set of 1-forms σ_1 and σ_2 defined on U satisfying the conditions

$$\begin{aligned} \langle \sigma_1 \lrcorner \gamma \rangle &= 1, & \langle \sigma_1 \lrcorner \bar{\gamma} \rangle &= 0, & \sigma_1, \sigma_2 &\in \Psi, \\ \langle \sigma_2 \lrcorner \gamma \rangle &= 0, & \langle \sigma_2 \lrcorner \bar{\gamma} \rangle &= 1. \end{aligned} \quad (11)$$

Substituting (7) and (10) into the prolonged system (8) and multiplying by σ_1 and σ_2 respectively, we get

$$\begin{aligned} (i) \quad d\xi \wedge \lambda + \xi (\bar{\xi}\bar{\lambda} \wedge \lambda_{,\bar{\gamma}} + \xi\lambda \wedge \bar{\lambda}_{,\gamma}) + \alpha\xi\bar{\xi}\bar{\lambda} \wedge \bar{\lambda} &= 0, \\ (ii) \quad d\bar{\xi} \wedge \bar{\lambda} + \bar{\xi} (\xi\lambda \wedge \bar{\lambda}_{,\gamma} + \bar{\xi}\bar{\lambda} \wedge \lambda_{,\bar{\gamma}}) + \bar{\alpha}\bar{\xi}\xi\bar{\lambda} \wedge \lambda &= 0. \end{aligned} \quad (12)$$

If $d\xi = d\bar{\xi}$ then equation (12.i) is a complex conjugate of (12.ii). So one can consider one of them, say (12.i). We look for the condition of integrability such that the system (12.i) does not impose any restriction on the form of the coefficients ξ and $\bar{\xi}$. By exterior multiplication of (12.i) by λ , we obtain

$$\lambda_{,\bar{\gamma}} \wedge \bar{\lambda} \wedge \lambda = 0 \quad (13)$$

and its respective complex conjugate equation

$$\bar{\lambda}_{,\gamma} \wedge \lambda \wedge \bar{\lambda} = 0. \quad (14)$$

Note that if conditions (10), (13) and (14) are satisfied, then from the Cartan lemma the system (12) and consequently the set of 1-forms (8) has nontrivial solutions for $d\xi$ and $d\bar{\xi}$. So under these circumstances the following result holds [29].

Proposition 1 *The necessary condition for the Pfaffian system (5) to possess a simple mode solution is that the following two constraints on the complex-valued vector fields γ and λ be satisfied*

$$(i) \quad [\gamma, \bar{\gamma}] = \alpha\gamma - \bar{\alpha}\bar{\gamma},$$

for any complex-valued function $\alpha \in \mathbb{C}$

$$(ii) \quad \lambda_{,\bar{\gamma}}, \bar{\gamma}_{,\gamma} \in \text{span} \{ \lambda, \bar{\lambda} \}.$$

Note that the conditions (10), (13) and (14) are strong requirements on the functions $\gamma = (\gamma^1, \dots, \gamma^q)$ and $\lambda = (\lambda_1, \dots, \lambda_p)$ and their complex conjugates which satisfy the wave relation (3). Consequently, the postulated form of a one-mode solution $u(x)$ of the elliptic system (2), required by the generalized method of characteristics (GMC) [21, 29], is such that all first-order derivatives of $u(x)$ with respect to x^i are decomposable in the form (5). This restriction is a strong limitation on the admissible class of solutions of (2). So far, there have been few, if any, known examples of such solutions. Therefore, it is worth developing this idea by weakening the integrability conditions (10), (13) and (14) in order to construct multi-mode solutions. In the next section we propose an alternative way of constructing multi-mode solutions (expressed in terms of Riemann invariants) which are obtained from a version of the conditional symmetry method (CSM) [16] by adapting it to the elliptic systems. This constitutes the objective of this paper.

3 Conditional symmetry method and multimode solutions in terms of Riemann Invariants.

In this section, we examine certain aspects of the conditional symmetry method in the context of Riemann invariants for which the wave vectors are complex solutions of the dispersion relation (4) associated with the original system (2). Let us consider a nondegenerate first-order quasilinear system of PDEs (2) in its matrix form

$$A^1(u)u_1 + \dots + A^p(u)u_p = 0, \quad (15)$$

where $A^1, \dots, A^p$ are $m \times q$ real-valued matrix functions of u . Let us suppose that there exist k linearly independent non-conjugate complex-valued wave vectors

$$\lambda^A(u) = (\lambda_1^A(u), \dots, \lambda_p^A(u)) \in \mathbb{C}^p, \quad \lambda^A \neq \bar{\lambda}^B \quad \forall B \in \{1, \dots, k\}, \quad A = 1, \dots, k < p \quad (16)$$

which satisfy the dispersion relation (4). One should note that in (16) we do not require indices $A \neq B$, which means that real wave vectors are excluded from our consideration (we do not consider here the mixed case for wave vectors involving real and complex wave vectors). Under the above hypotheses, k wave vectors (16) and their complex conjugates

$$\bar{\lambda}^A(u) = (\bar{\lambda}_1^A(u), \dots, \bar{\lambda}_p^A(u)) \in \mathbb{C}^p, \quad A = 1, \dots, k,$$

satisfy the dispersion relation (4). In what follows it is useful to introduce the notation *c.c.* which means the complex conjugate of the previous term or equation. This notation is convenient for computational purposes allowing the presentation of some expressions in abbreviated form.

Let us suppose that there exists a unique solution $u(x)$ of the equations (1) of the form

$$u = f(r^1(x, u), \dots, r^k(x, u), \bar{r}^1(x, u), \dots, \bar{r}^k(x, u)) + c.c., \quad (17)$$

where the complex-valued functions $r^A, \bar{r}^A : \mathbb{R}^p \times \mathbb{R}^q \rightarrow \mathbb{C}$ are called the Riemann invariants associated respectively to wave vectors $\lambda^A, \bar{\lambda}^A$ and are defined by

$$r^A(x, u) = \lambda_i^A(u)x^i, \quad \bar{r}^A(x, u) = \bar{\lambda}_i^A(u)x^i, \quad A = 1, \dots, k. \quad (18)$$

Note that the functions $u(x)$ are defined implicitly in terms of u^α, x^i, r^A and $\bar{r}^A$. For any function $f : \mathbb{C}^k \rightarrow \mathbb{C}^q$ and its complex conjugate, the equation (17) determines a unique real function $u(x)$ on a neighborhood of the origin $x = 0$. The Jacobi matrix of derivatives of $u(x)$ is given by

$$\partial u = (u_i^\alpha) = \left(I_q - \left[\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \frac{\partial r}{\partial u} + c.c. \right] \right)^{-1} \left(\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \lambda + c.c. \right), \quad (19)$$

or equivalently as

$$\partial u = \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) (M^1 \lambda + M^2 \bar{\lambda}) + c.c. \quad (20)$$

where the $k \times k$ matrices M^1 and M^2 are defined by

$$M^1 = \left[I_k - \frac{\partial r}{\partial u} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) - \frac{\partial r}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \left(I_k - \frac{\partial \bar{r}}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \right)^{-1} \frac{\partial \bar{r}}{\partial u} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \right]^{-1}, \quad (21)$$

$$M^2 = -M^1 \frac{\partial r}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \left(I_k - \frac{\partial \bar{r}}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \right)^{-1},$$

$$\frac{\partial f}{\partial r} = \left(\frac{\partial f^\alpha}{\partial r^A} \right) \in \mathbb{C}^{q \times k}, \quad \frac{\partial f}{\partial \bar{r}} = \left(\frac{\partial f^\alpha}{\partial \bar{r}^A} \right) \in \mathbb{C}^{q \times k}, \quad \lambda = (\lambda_i^A) \in \mathbb{C}^{k \times p}, \quad (22)$$

$$\frac{\partial r}{\partial u} = \left(\frac{\partial r^A}{\partial u^\alpha} \right) = \left(\frac{\partial \lambda_i^A}{\partial u^\alpha} x^i \right) \in \mathbb{C}^{k \times q}, \quad r = (r^1, \dots, r^k), \quad (23)$$

and their respective conjugate equations. The matrices I_q and I_k are the $q \times q$ and $k \times k$ identity matrices respectively. We use the implicit function theorem to obtain the following conditions ensuring that $r^A, \bar{r}^A$ and u^α are expressible as graphs over some open subset $\mathcal{D} \subset \mathbb{R}^p$,

$$\det \left(I_q - \left[\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \frac{\partial r}{\partial u} + c.c. \right] \right) \neq 0 \quad (24)$$

or

$$\det \left(I_k - \frac{\partial r}{\partial u} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \right) \neq 0, \quad \text{and} \quad \det \left[I_k - \frac{\partial \bar{r}}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) - \frac{\partial \bar{r}}{\partial u} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \left(I_k - \frac{\partial r}{\partial u} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \right)^{-1} \frac{\partial r}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \right] \neq 0 \quad (25)$$

So the inverse matrix in (19) or in (20) is well-defined in the vicinity of $x = 0$, since

$$\frac{\partial r}{\partial u} = 0, \quad \frac{\partial \bar{r}}{\partial u} = 0 \text{ at } x = 0. \quad (26)$$

Note that on the hypersurface defined by equation (17) and one of the expressions (24) or (25) equal to zero, the gradient of the function $u(x)$ becomes infinite for some value of x^i . So the multimode solution, given by expression (17) loses its sense on this hypersurface. Consequently, some types of discontinuities, *i.e.* shock waves can occur. In what follows, we search for solutions defined on a neighborhood of $x = 0$

under the assumption that the conditions (24) or (25) are different from zero. This means that if the initial data is sufficiently small, then there exists a time interval $[t_0, T]$, $T > t_0$ (where we denote the independent variables by $t = x^0, \tilde{x} = x^1, \dots, x^n$ where $p = n + 1$) in which the gradient catastrophe for the solution $u(t, \tilde{x})$ of the system (2) does not take place [30].

Note that the Jacobian matrix of $u(x)$ has at most rank equal to $2k$. It follows that the proposed solution (17) is also at most of rank- $2k$. Its image is a $2k$ -dimensional submanifold $\mathbb{S}_{2k}$ in the first jet space $J^1 = J^1(X \times U)$.

Let us introduce now a set of $p - 2k$ linearly independent vectors $\xi_a : \mathbb{R}^q \rightarrow \mathbb{C}^p$ defined by

$$\xi_a(u) = (\xi_a^1(u), \dots, \xi_a^p(u)), \quad a = 1, \dots, p - 2k, \quad (27)$$

satisfying the orthogonality conditions

$$\lambda_i^A \xi_a^i = 0, \quad \bar{\lambda}_i^A \xi_a^i = 0, \quad A = 1, \dots, k, \quad a = 1, \dots, p - 2k, \quad (28)$$

for a set of $2k$ linearly independent wave vectors $\{\lambda^1, \dots, \lambda^k, \bar{\lambda}^1, \dots, \bar{\lambda}^k\}$. It should be noted that the set $\{\lambda^1, \dots, \lambda^k, \bar{\lambda}^1, \dots, \bar{\lambda}^k, \xi^1, \dots, \xi^{p-2k}\}$ forms a basis for the space of independent variables X . Note also, that the vectors ξ_a are not uniquely defined since they obey the homogeneous conditions (28). As a consequence of equation (19) or (20), the graph $\Gamma = \{x, u(x)\}$ is invariant under the family of first-order differential operators

$$X_a = \xi_a^i(u) \frac{\partial}{\partial x^i}, \quad a = 1, \dots, p - 2k, \quad (29)$$

defined on $X \times U$ space. Since the vector fields X_a do not include vectors tangent to the direction of u , they form an Abelian distribution on $X \times U$ space, *i.e.*

$$[X_a, X_b] = 0, \quad a, b = 1, \dots, p - 2k. \quad (30)$$

The set $\{r^1, \dots, r^k, \bar{r}^1, \dots, \bar{r}^k, u^1, \dots, u^q\}$ constitutes a complete set of invariants of the Abelian algebra $\mathcal{L}$ generated by the vector fields (29). So geometrically, the characterization of the proposed solution (17) of equations (15) can be interpreted in the following way. If $u(x)$ is a q -component function defined on a neighborhood of the origin $x = 0$ such that the graph of the solution $\Gamma = \{(x, u(x))\}$ is invariant under a set of $p - 2k$ vector fields X_a with the orthogonality property (28), then for some function f the expression $u(x)$ is a solution of equation (17). Hence the group-invariant solutions of the system (15) consist of those functions $u = f(x)$ which satisfy the overdetermined system composed of the initial system (15) together with the invariance conditions

$$\xi_a^i u_i^\alpha = 0, \quad i = 1, \dots, p, \quad a = 1, \dots, p - 2k, \quad (31)$$

ensuring that the characteristics of the vector fields X_a are equal to zero.

It should be noted that, in general, the conditions (31) are weaker than the differential constraints (5) required by the generalized method of characteristics, since the latter method is subjected to the algebraic conditions (3). In fact, equations (31) imply that there exist complex-valued matrix functions

$\Phi_A^\alpha(x, u)$ and $\bar{\Phi}_A^\alpha(x, u)$ defined on the first jet space $J = J(X \times U)$ such that all first derivatives of u with respect to x^i are decomposable in the following way

$$u_i^\alpha = \Phi_A^\alpha(x, u)\lambda_i^A + \bar{\Phi}_A^\alpha(x, u)\bar{\lambda}_i^A \quad (32)$$

where

$$\begin{aligned} \Phi_A^\alpha &= \left(I_q - \left[\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \frac{\partial r}{\partial u} + c.c. \right] \right)^{-1} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \\ \bar{\Phi}_A^\alpha &= \left(I_q - \left[\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \frac{\partial r}{\partial u} + c.c. \right] \right)^{-1} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \end{aligned} \quad (33)$$

or

$$\begin{aligned} \Phi_A^\alpha &= \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) M^1 + \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \bar{M}^2 \\ \bar{\Phi}_A^\alpha &= \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \bar{M}^1 + \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) M^2 \end{aligned} \quad (34)$$

The matrices $\Phi_A^\alpha \lambda_i^A$ and $\bar{\Phi}_A^\alpha \bar{\lambda}_i^A$ appearing in equation (32) do not necessarily satisfy the wave relation (3). As a result of this fact, the restrictions on the initial data at $t = 0$ are eased, so we are able to consider more diverse types of modes in the superpositions than in the case of the generalized method of characteristics described in section 2.

Let us now proceed to solve the overdetermined system composed of equations (15) and differential constraints (31)

$$A_\alpha^{i\mu}(u)u_i^\alpha = 0, \quad \xi_a^i(u)u_i^\alpha = 0. \quad (35)$$

Substituting (19) or (20) into (15) yields the trace condition

$$\text{tr} \left(A^\mu \left(I_q - \left[\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \frac{\partial r}{\partial u} + c.c. \right] \right)^{-1} \left(\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \lambda + c.c. \right) \right) = 0 \quad (36)$$

or

$$\text{tr} \left(A^\mu \left[\left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) (M^1 \lambda + M^2 \bar{\lambda}) + c.c. \right] \right) = 0 \quad (37)$$

on the wave vectors λ and $\bar{\lambda}$ and on the functions f and $\bar{f}$, where $A^1, \dots, A^q$ are $p \times q$ matrix functions of u (i.e. $A^\mu = (A_\alpha^{\mu i}(u)) \in \mathbb{R}^{p \times q}$, $\mu = 1, \dots, m$). For the given initial system of equations (15), the matrices A^μ are known functions of u and the trace conditions (36) or (37) are conditions on the functions $f, \bar{f}, \lambda, \bar{\lambda}$ (or on ξ due to the orthogonality conditions (28)). From the computational point of view, it is useful to split x^i into x^{iA} and x^{i_a} and to choose a basis for the wave vector λ^A and $\bar{\lambda}^A$ such that

$$\lambda^A = dx^{iA} + \lambda_{i_a}^A dx^{i_a}, \quad \bar{\lambda}^A = dx^{iA} + \bar{\lambda}_{i_a}^A dx^{i_a}, \quad A = 1, \dots, k, \quad (38)$$

where (i_A, i_a) is a permutation of $(1, \dots, p)$. So, the expressions (23) become

$$\frac{\partial r^A}{\partial u^\alpha} = \frac{\partial \lambda_{i_a}^A}{\partial u^\alpha} x^{i_a}, \quad \frac{\partial \bar{r}^A}{\partial u^\alpha} = \frac{\partial \bar{\lambda}_{i_a}^A}{\partial u^\alpha} x^{i_a}. \quad (39)$$

Substituting (39) into (36) (or (37)) yields

$$\text{tr} \left(A^\mu (I_q - Q_a x^{i_a})^{-1} \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \Lambda \right) = 0, \quad \mu = 1 \dots, m, \quad (40)$$

or

$$\text{tr} \left(A^\mu \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) (I_{2k} - K_a x^{i_a})^{-1} \Lambda \right) = 0, \quad \mu = 1 \dots, m, \quad (41)$$

where $R = (r^1, \dots, r^k, \bar{r}^1, \dots, \bar{r}^k)^T$ and

$$\begin{aligned} Q_a &= \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) \frac{\partial \lambda_{i_a}}{\partial u} + \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \frac{\partial \bar{\lambda}_{i_a}}{\partial u} = \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \eta_a \in \mathbb{C}^{q \times q}, \\ K_a &= \begin{pmatrix} \frac{\partial \lambda_{i_a}}{\partial u} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) & \frac{\partial \lambda_{i_a}}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \\ \frac{\partial \bar{\lambda}_{i_a}}{\partial u} \left(\frac{\partial f}{\partial r} + \frac{\partial \bar{f}}{\partial r} \right) & \frac{\partial \bar{\lambda}_{i_a}}{\partial u} \left(\frac{\partial f}{\partial \bar{r}} + \frac{\partial \bar{f}}{\partial \bar{r}} \right) \end{pmatrix} = \eta_a \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \in \mathbb{C}^{2k \times 2k}, \end{aligned} \quad (42)$$

and for simplicity of notation, we note

$$\Lambda = \begin{pmatrix} \lambda \\ \bar{\lambda} \end{pmatrix} \in \mathbb{C}^{2k \times p}, \quad \eta_a = \begin{pmatrix} \frac{\partial \lambda_{i_a}}{\partial u} \\ \frac{\partial \bar{\lambda}_{i_a}}{\partial u} \end{pmatrix} \in \mathbb{C}^{2k \times q}, \quad \frac{\partial f}{\partial R} = \begin{pmatrix} \frac{\partial f}{\partial r} & \frac{\partial f}{\partial \bar{r}} \end{pmatrix} \in \mathbb{C}^{q \times 2k}, \quad (43)$$

for i_A fixed and $i_a = 1, \dots, p-1$. In (42) the $2k \times 2k$ matrix K_a is defined in terms of the $k \times k$ subblocks of the form $\partial \lambda_{i_a} / \partial u (\partial f / \partial r + \partial \bar{f} / \partial r)$, where η_a is a matrix form of the block $\partial \lambda_a / \partial u$ over the block $\partial \bar{\lambda}_a / \partial u$. The notation $(\partial f / \partial r, \partial f / \partial \bar{r})$ represents the matrix formed of the left block $\partial f / \partial r$ and the right block $\partial f / \partial \bar{r}$. Note that the functions r^A , $\bar{r}^A$ and x^{i_a} are functionally independent in a neighborhood of $x = 0$ and the matrix functions A^μ , $\partial f / \partial r$, $\partial f / \partial \bar{r}$, $\partial \bar{f} / \partial r$, $\partial \bar{f} / \partial \bar{r}$, Q_a and K_a depend on r and $\bar{r}$ only. So, equations (40) (or (41)) have to be satisfied for any value of coordinates x^{i_a} . As a consequence, we have some constraints on these matrix functions. From the Cayley-Hamilton theorem, we know that for any $n \times n$ invertible matrix M , the expression $(M^{-1} \det M)$ is a polynomial in M of order $(n-1)$. Thus, using the tracelessness of the expression $A^\mu (I_q - Q_a x^{i_a})^{-1} (\partial f / \partial R) \Lambda$, we can replace equations (40) by the following condition

$$\text{tr} \left(A^\mu Q \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \Lambda \right) = 0, \quad \text{where } Q = \text{adj}(I_q - Q_a x^{i_a}) \in \mathbb{C}^{q \times q}, \quad (44)$$

where $\text{adj } M$ denotes the adjoint of the matrix M . As a consequence the matrix Q is a polynomial of order $(q-1)$ in x^{i_a} . Taking (44) and all its partial derivatives with respect to x^{i_a} (with r , $\bar{r}$ fixed at $x = 0$), we obtain the following conditions for the matrix functions $f(r, \bar{r})$ and $\lambda(f(r, \bar{r}))$

$$\text{tr} \left(A^\mu \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \Lambda \right) = 0, \quad \mu = 1, \dots, m, \quad (45)$$

$$\text{tr} \left(A^\mu Q_{(a_1 \dots a_s)} \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \Lambda \right) = 0, \quad (46)$$

where $s = 1, \dots, q-1$ and $(a_1, \dots, a_s)$ denotes the symmetrization over all indices in the bracket. A similar procedure can be applied to system (41) to yield (45) and

$$\text{tr} \left(A^\mu \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) K_{(a_1 \dots a_s)} \Lambda \right) = 0, \quad (47)$$

where now $s = 1, \dots, 2k-1$. Equations (45) represent the initial value conditions on a surface in the space of independent variables X , given at $x^{i_a} = 0$. Note that equations (46) (or (47)) form the conditions required for the preservation of the property (45) along the flows represented by the vector fields (29). Equation (38) allows us to express X_a in the form

$$X_a = \partial_{i_a} - \lambda_{i_a}^A \partial_{i_A} - \bar{\lambda}_{i_a}^A \partial_{i_A}, \quad A = 1, \dots, k. \quad (48)$$

Substituting expressions (42) into (46) or (47) and simplifying gives the unified form

$$\text{tr} \left(A^\mu \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \eta_{(a_1} \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \dots \eta_{a_s)} \left(\frac{\partial f}{\partial R} + \frac{\partial \bar{f}}{\partial R} \right) \Lambda \right) = 0, \quad (49)$$

The index s is either $\max(s) = q-1$ or $\max(s) = 2k-1$, we choose the one which is more convenient from the computational point of view. In this case, for $k \geq 1$ the two approaches, CSM and GMC, become essentially different and, as we demonstrate in the following examples, the CSM can provide rank- $2k$ solutions which are not Riemann $2k$ -waves as defined by the GMC since we weaken the integrability conditions (2) for the wave vectors λ and $\bar{\lambda}$.

A change of variable on $X \times U$ allows us to rectify the vector fields X_a and considerably simplify the structure of the overdetermined system (35) which classifies the preceding construction of multimodes solutions. For this system, in the new coordinates, we derive the necessary and sufficient conditions for the existence of rank- $2k$ solutions of the form (17). Suppose that there exists an invertible $2k \times 2k$ subblock matrix

$$L = (\Lambda_B^A), \quad 1 \leq A, B \leq 2k, \quad (50)$$

of the larger matrix $\Lambda \in \mathbb{C}^{2k \times p}$, then the independent vector fields X_a can be written as

$$X_a = \partial_{x^{a+2k}} - (L^{-1})_B^A \Lambda_{a+2k}^B \partial_{x^A}, \quad (51)$$

which have the required form (29) and for which the orthogonality conditions (28) are fulfilled. We introduce new coordinate functions

$$\begin{aligned} z^1 &= r^1(x, u), \dots, z^k = r^k(x, u), z^{k+1} = \bar{r}^1(x, u), \dots, z^{2k} = \bar{r}^k(x, u), \\ z^{2k+1} &= x^{2k+1}, \dots, z^p = x^p, \quad v^1 = u^1, \dots, v^q = u^q, \end{aligned} \quad (52)$$

on $X \times U$ space which allow us to rectify the vector fields (51). As a result, we get

$$X_1 = \frac{\partial}{\partial z^{2k+1}}, \dots, X_{p-2k} = \frac{\partial}{\partial z^p}. \quad (53)$$

The p -dimensional submanifold invariant under $X_1, \dots, X_{p-2k}$, is defined by equations of the form

$$v = f(z^1, \dots, z^k, \bar{z}^1, \dots, \bar{z}^k) + c.c. \quad (54)$$

for an arbitrary function $f : X \rightarrow U$. The expression (54) is the general solution of the invariance conditions

$$v_{z^{2k+1}}, \dots, v_{z^p} = 0. \quad (55)$$

In general, the initial system (15) described in the new coordinates $(x, v) \in X \times U$ is a nonlinear system of first-order PDEs, of the form

$$\begin{aligned} A_\beta^{l\mu}(v) \frac{\partial r^i}{\partial x^l} \frac{\partial v^\beta}{\partial z^j} &= 0, & i = 1, \dots, k, \\ A_\beta^{l\mu}(v) \frac{\partial \bar{r}^i}{\partial x^l} \frac{\partial v^\beta}{\partial z^j} &= 0, & i = k+1, \dots, 2k, \\ A_\beta^{i\mu}(v) \frac{\partial v^\beta}{\partial z^j} &= 0, & i = 2k+1, \dots, p. \end{aligned} \quad (56)$$

We obtain the following Jacobi matrix in the coordinates $(z, \bar{z}, v)$

$$\frac{\partial z^j}{\partial x^i} = (\Omega^{-1})_l^j \Lambda_i^l \in \mathbb{C}^{p \times p}, \quad \Omega = \delta_s^i - \frac{\partial \Lambda_i^j}{\partial v^\beta} \frac{\partial v^\beta}{\partial z^s} x^l, \quad (57)$$

whenever the invariance conditions (55) are satisfied. Appending to the system (56) the invariance condition (55), we obtain the quasilinear reduced system of PDEs

$$\begin{aligned} \text{tr} \left(A^\mu(v) \left(I_q - \frac{\partial v}{\partial z} \frac{\partial R}{\partial v} \right)^{-1} \frac{\partial v}{\partial z} \Lambda \right) &= 0, & \mu = 1, \dots, m, \\ \frac{\partial v}{\partial z^{2k+1}}, \dots, \frac{\partial v}{\partial z^p} &= 0 \end{aligned} \quad (58)$$

or

$$\begin{aligned} \text{tr} \left(A^\mu(v) \frac{\partial v}{\partial z} \left(I_{2k} - \frac{\partial R}{\partial v} \frac{\partial v}{\partial z} \right)^{-1} \Lambda \right) &= 0, & \mu = 1, \dots, m, \\ \frac{\partial v}{\partial z^{2k+1}}, \dots, \frac{\partial v}{\partial z^p} &= 0 \end{aligned} \quad (59)$$

We now provide some basic definitions that we require for the use of the conditional symmetry method in order to encompass the use of Riemann invariants.

A vector field X_a is called a conditional symmetry of the original system (15) if X_a is tangent to the manifold $\mathbb{S} = \mathbb{S}_\Delta \cap \mathbb{S}_Q$, *i.e.*

$$\text{pr}^{(1)} X_a \Big|_{\mathbb{S}} \in T_{(x, u^{(1)})} \mathbb{S}, \quad (60)$$

where the first prolongation of X_a is given by

$$\text{pr}^{(1)} X_a = X_a - \xi_{a, u^\beta}^i u_j^\beta u_i^\alpha \frac{\partial}{\partial u_j^\alpha}, \quad a = 1, \dots, p-2k \quad (61)$$

and the submanifolds of the solution spaces are given by

$$\mathbb{S}_\Delta = \left\{ (x, u^{(1)}) : A_\alpha^{i\mu} u_i^\alpha = 0, \quad \mu = 1, \dots, m \right\}, \quad (62)$$

and

$$\mathbb{S}_Q = \left\{ (x, u^{(1)}) : \xi_a^i(u) u_i^\alpha = 0, \quad \alpha = 1, \dots, q, \quad a = 1, \dots, p-2k \right\}. \quad (63)$$

As a consequence, we can define an Abelian Lie algebra.

An Abelian Lie algebra $\mathcal{L}$ generated by the vector fields $X_1, \dots, X_{p-2k}$ is called a conditional symmetry algebra of the original system (15) if the conditions

$$\text{pr}^{(1)} X_a (A^i u_i) \Big|_{\mathbb{S}} = 0, \quad a = 1, \dots, p-2k, \quad (64)$$

are satisfied.

Supposing that $\mathcal{L}$, spanned by the vector fields $X_1, \dots, X_{p-2k}$, is a conditional symmetry algebra of the system (15), a solution $u = f(x)$ is said to be a conditionally invariant solution of the system (15) if the graph $\Gamma = \{(x, f(x))\}$ is invariant under the vector fields $X_1, \dots, X_{p-2k}$.

Proposition. *A nondegenerate quasilinear hyperbolic system of first-order PDEs (15) in p independent variables and q dependent variables admits a $p-2k$ -dimensional symmetry algebra $\mathcal{L}$ if and only if $(p-2k)$ linearly independent vector fields $X_1, \dots, X_{p-2k}$ satisfy the conditions (45) and (49) on some neighborhood of (x_0, u_0) of S . The solutions of (15) which are invariant under the Lie algebra $\mathcal{L}$ are precisely k -mode solutions of the form (17).*

proof The proof of this proposition is essentially similar to that of the proposition in [16]. For the sake of completeness we now give it. Let us express the vector fields X_a in the new coordinates (z, v) on $X \times U$. Equations (53) and (61) imply that

$$\text{pr}^{(1)} X_a = X_a, \quad a = 1, \dots, p-2k. \quad (65)$$

The symmetry criterion that has to be satisfied for G to be the symmetry group of the overdetermined system (58) (or (59)) requires that the vector fields X_a of G satisfy $X_a(\Delta) = 0$, whenever equation (58) (or (59)) is satisfied. Thus the symmetry criterion applied to the invariance conditions (55) vanishes identically. Applying this criterion to the system (56) in the new coordinates, carrying out the differentiation and taking into account the conditions (45) and (49), we obtain the equations which are identically satisfied.

The converse is also true. The assumption that the system (15) is nondegenerate means, according to [27], that it is locally solvable and is of maximal rank at every point $(x_0, u_0) \in S$. Therefore, the infinitesimal symmetry condition is a necessary and sufficient condition for the existence of the symmetry group G of the overdetermined system (35). Since the vector fields X_a form an Abelian distribution on $X \times U$, it follows that conditions (45) and (49) are satisfied. The solutions of the overdetermined system (35) are invariant under the algebra $\mathcal{L}$ generated by the $p-2k$ vector fields $X_1, \dots, X_{p-2k}$. The invariants of the group G of such vector fields are provided by the functions $\{r^1, \dots, r^k, \bar{r}^1, \dots, \bar{r}^k, u^1, \dots, u^q\}$. So the general multimode solution of (15) takes the required form (17).

□

4 The ideal plastic flow.

In this section we would like to illustrate the proposed approach for constructing multimode solutions with the example of the ideal nonstationary irrotational planar ideal plastic flow subjected to an external force due to a potential V . Under the above assumptions the examined model is governed by a quasilinear homogenous system of five equations in (2+1) dimensions of the form [5, 20, 24]

$$\begin{aligned}
(a) \quad & \sigma_x - (\theta_x \cos 2\theta + \theta_y \sin 2\theta) + \rho(V_x - u_t - uu_x - vv_y) = 0, \\
(b) \quad & \sigma_y - (\theta_x \sin 2\theta - \theta_y \cos 2\theta) + \rho(V_y - v_t - uv_x - vv_y) = 0, \\
(c) \quad & (u_y + v_x) \sin 2\theta + (u_x - v_y) \cos 2\theta = 0, \\
(d) \quad & u_x + v_y = 0, \\
(e) \quad & u_y - v_x = 0.
\end{aligned} \tag{66}$$

Equations (66.a) and (66.b) involve the independent variables σ, θ, u, v and the potential V is a given function of $(t, x, y) \in \mathbb{R}^3$. The stress tensor is defined by the mean pressure σ and θ is the angle relative to the x -axis minus $\pi/4$. Equation (66.c) represents the Saint-Venant-Von Mises plasticity equation. Equations (66.d) and (66.e) for the velocities u and v (along the x -axis and y -axis respectively) correspond to the incompressibility and the irrotationality of the flow of the plastic material. The independent variables are denoted by $(x^i) = (t, x, y) \in X \subset \mathbb{R}^3$ and the unknown functions by $(u^\alpha) = (\sigma, \theta, u, v) \in U \subset \mathbb{R}^4$. The first-order partial derivatives of σ with respect to the independent variables x and y are denoted σ_x and σ_y respectively. The first-order partial derivatives of u, v and θ are denoted similarly.

Before using the approach described in section 3 to obtain solutions of the system (66), we begin by expressing the system (66) in a form which is more convenient for the purpose of computation. In the first place, we note that the equations (66.a) and (66.b) governing the average pressure σ can be solved by quadrature when the angle θ satisfies the compatibility conditions for the mixed derivatives of σ with respect to x and y . This equation takes the form

$$2(\theta_x^2 - \theta_{xy} - \theta_y^2) \cos(2\theta) + (\theta_{xx} - 4\theta_x\theta_y - \theta_{yy}) \sin(2\theta) = 0 \tag{67}$$

If θ satisfies (67), then the pressure σ can be expressed in terms of the velocities u, v , of the angle θ and of the potential V with the form

$$\begin{aligned}
\sigma(t, x, y) = & -\rho V(t, x, y) + \frac{1}{2} \sin(2\theta(t, x, y)) + \rho \frac{u(t, x, y)^2 + v(t, x, y)^2}{2} + \rho \int u_t(t, x, y) dx \\
& + \int \theta_y(t, x, y) \sin(2\theta(t, x, y)) dx + c_0(t)
\end{aligned} \tag{68}$$

It should be noted that in order to obtain the compatibility condition (67), one has to make use of equation (66.e), that is, we must suppose that the flow is irrotational. In order to find a solution of the original system (66), it is still necessary to find a solution of the overdetermined system consisting of equations (67), (66.c)-(66.e) for the three unknown functions u, v and θ . In order to reduce the order of the PDE (67), we introduce the dependent variables ϕ and ψ , which are defined by the equations

$$\phi = \theta_x, \quad \psi = \theta_y. \tag{69}$$

Therefore, we have to solve the following well-determined first-order system of 4 equations in the 4 unknowns ϕ, ψ, u, v

$$\begin{aligned}
(a) \quad & (2\phi^2 - (\phi_y - \psi_x) - 2\psi^2) u_y + (\phi_x + 4\phi\psi - \psi_y) u_x = 0 \\
(b) \quad & \phi_y - \psi_x = 0, \\
(c) \quad & u_x + v_y = 0, \\
(d) \quad & u_y - v_x = 0
\end{aligned} \tag{70}$$

Time appears in system (70) only as a parameter since the system does not involve any derivatives with respect to time. Therefore, when solving the system (70) we treat the unknowns ϕ, ψ, u, v in (70) as functions of x and y only, and subsequently we replace the integration constant by arbitrary function of t . Since equation (70.a) is not quasilinear, the CSM as presented in section 3 cannot be applied to the entire system (70). Nevertheless, the CSM can be used for the subsystem Δ of 3 equations in the 4 unknowns consisting of (70.b)-(70.d), which is then underdetermined. Next, we use the degrees of freedom of the obtained solution to satisfy equation (70.a). The subsystem Δ can be written in the following matrix form:

$$\begin{pmatrix} 0 & -1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & -1 \end{pmatrix} \frac{\partial}{\partial x} \begin{pmatrix} \phi \\ \psi \\ u \\ v \end{pmatrix} + \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{pmatrix} \frac{\partial}{\partial x} \begin{pmatrix} \phi \\ \psi \\ u \\ v \end{pmatrix} = 0 \tag{71}$$

The dispersion relation (4) takes the form

$$\text{rank} \begin{pmatrix} \lambda_2 & -\lambda_1 & 0 & 0 \\ 0 & 0 & \lambda_1 & \lambda_2 \\ 0 & 0 & \lambda_2 & -\lambda_1 \end{pmatrix} < 3. \tag{72}$$

By solving the dispersion relation (72), we obtain the following two types of wave vectors

$$\lambda = (1, i), \quad \bar{\lambda} = (1, -i). \tag{73}$$

The Riemann invariants associated with the wave vectors λ and $\bar{\lambda}$ are

$$r = x + iy, \quad \bar{r} = x - iy. \tag{74}$$

We seek a real solution of (70.b)-(70.d) of the form

$$\begin{aligned}
\phi &= f_1(r, \bar{r}) + \bar{f}_1(r, \bar{r}), & \psi &= f_2(r, \bar{r}) + \bar{f}_2(r, \bar{r}), \\
u &= f_3(r, \bar{r}) + \bar{f}_3(r, \bar{r}), & v &= f_4(r, \bar{r}) + \bar{f}_4(r, \bar{r}).
\end{aligned} \tag{75}$$

Introducing the notation $\phi = u^1, \psi = u^2, u = u^3, v = u^4$ and

$$\Lambda = \begin{pmatrix} 1 & i \\ 1 & -i \end{pmatrix},$$

we observe that the matrices η_{a_j} defined by (43) all vanish. Consequently, all trace conditions (49) used to obtain solutions of the form (75) are identically satisfied. We still have to consider the trace conditions (45) where the matrices $A^\mu, \mu = 1, 2, 3$, are given by

$$A^1 = \begin{pmatrix} 0 & -1 & 0 & 0 \\ 1 & 0 & 0 & 0 \end{pmatrix}, \quad A^2 = \begin{pmatrix} 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}, \quad A^3 = \begin{pmatrix} 0 & 0 & 0 & -1 \\ 0 & 0 & -1 & 0 \end{pmatrix}.$$

Conditions (45) take the form

$$\begin{aligned}
(a) \quad & \frac{\partial f^1}{\partial r} + \frac{\partial \bar{f}^1}{\partial r} - \frac{\partial f^1}{\partial \bar{r}} - \frac{\partial \bar{f}^1}{\partial \bar{r}} + i \left(\frac{\partial f^2}{\partial r} + \frac{\partial \bar{f}^2}{\partial r} + \frac{\partial f^2}{\partial \bar{r}} + \frac{\partial \bar{f}^2}{\partial \bar{r}} \right), \\
(b) \quad & \frac{\partial f^3}{\partial r} + \frac{\partial \bar{f}^3}{\partial r} + \frac{\partial f^3}{\partial \bar{r}} + \frac{\partial \bar{f}^3}{\partial \bar{r}} + i \left(\frac{\partial f^4}{\partial r} + \frac{\partial \bar{f}^4}{\partial r} - \frac{\partial f^4}{\partial \bar{r}} - \frac{\partial \bar{f}^4}{\partial \bar{r}} \right), \\
(c) \quad & \frac{\partial f^3}{\partial r} + \frac{\partial \bar{f}^3}{\partial r} - \frac{\partial f^3}{\partial \bar{r}} - \frac{\partial \bar{f}^3}{\partial \bar{r}} + i \left(\frac{\partial f^4}{\partial r} + \frac{\partial \bar{f}^4}{\partial r} + \frac{\partial f^4}{\partial \bar{r}} + \frac{\partial \bar{f}^4}{\partial \bar{r}} \right).
\end{aligned} \tag{76}$$

Condition (76.a) implies that

$$\mathcal{R}e \left(\frac{\partial \psi}{\partial r} \right) = -\mathcal{I}m \left(\frac{\partial \phi}{\partial r} \right), \tag{77}$$

while conditions (76.b) and (76.c) imply that the solutions for velocities u and v take the particular form

$$u = h(r) + \bar{h}(\bar{r}), \quad v = i(h(r) - \bar{h}(\bar{r})), \tag{78}$$

where r and $\bar{r}$ are given by (74) and the function h and its complex conjugate are also determined using condition (77) and the PDE (70.a). This allows us to also determine the functions ϕ and ψ . For computational purposes, it is convenient to introduce velocities of the form (78) in equation (66.c) in order to determine the angle θ in the form

$$\theta = \frac{1}{2} \arctan \left(i \frac{h^{(1)}(r) + \bar{h}^{(1)}(\bar{r})}{(h^{(1)}(r) - \bar{h}^{(1)}(\bar{r}))} \right), \tag{79}$$

where we denote $h^{(n)} = d^n h / dr^n$. Next, we substitute (79) into equation (67) in order to determine the function h and its complex conjugate. Proceeding in this way, we find that h and $\bar{h}$ satisfy the third-order ODE which is separable in r and $\bar{r}$. It is therefore equivalent to the system

$$\begin{aligned}
(a) \quad & 2 \frac{h^{(3)}(r)}{h^{(1)}(r)^2} - 3 \frac{h^{(2)}(r)}{h^{(1)}(r)^3} = \Omega, \\
(b) \quad & 2 \frac{\bar{h}^{(3)}(\bar{r})}{\bar{h}^{(1)}(\bar{r})^2} - 3 \frac{\bar{h}^{(2)}(\bar{r})}{\bar{h}^{(1)}(\bar{r})^3} = \Omega,
\end{aligned} \tag{80}$$

where Ω is a real separation constant. Equation (80.b) can be solved in a way similar way to (80.a). Defining

$$g(r) = h^{(1)}(r), \tag{81}$$

equation (80.a) can be written as

$$gg'' - 3/2(g')^2 + (\Omega/2)g^3 = 0. \tag{82}$$

According to [23] equation (82) admits a first integral which can be rewritten in the equivalent form

$$\frac{dg}{g^{3/2} \sqrt{c_1 - \Omega \ln(g)}} = d\xi. \tag{83}$$

By the change of variable

$$g = \exp\left(\frac{c_1 - \omega^2}{\Omega}\right), \quad (84)$$

equation (83) can be transformed to $2 \exp((2\Omega)^{-1}(\omega^2 - c_1)) d\omega = \pm \Omega d\xi$, for which the solution, in term of the inverse error function erf^{-1} , is

$$\omega = \sqrt{-2\Omega \left[\text{erf}^{-1} \left(e^{c_1/(2\Omega)} \frac{-i(c_2 \pm \Omega\xi)}{\sqrt{2\pi\Omega}} \right) \right]^2}, \quad (85)$$

where c_2 is a constant of integration. We substitute (84) into (81) with ω given by (85) and integrate the result. We obtain the function $h(r)$ and its complex conjugate in terms of the error functions erfi and erf^{-1} as

$$\begin{aligned} h(r) &= -\frac{2\pi c_1}{\Omega} \text{erfi} [\text{erf}^{-1}(c_2 + c_1 r)] + c_3, \\ \bar{h}(\bar{r}) &= -\frac{2\pi \bar{c}_1}{\Omega} \text{erfi} [\text{erf}^{-1}(\bar{c}_2 + \bar{c}_1 \bar{r})] + \bar{c}_3, \end{aligned} \quad (86)$$

where the $c_i \in \mathbb{C}$ are integration constants and the real separation constant Ω is non zero. Since equations (86) solve the system (80), we have that θ given by (79) satisfies the compatibility condition (67) for σ . One should note that no derivatives with respect to time appear in the PDE (67). Consequently, the equation (67) is still satisfied if, in equations (78) and (79), we replace the function $h(r)$ and its complex conjugate respectively by

$$\begin{aligned} h(t, r) &= -\frac{2\pi c_1(t)}{\Omega(t)} \text{erfi} [\text{erf}^{-1}(c_2(t) + c_1(t)r)] + c_3(t), \\ \bar{h}(t, \bar{r}) &= -\frac{2\pi \bar{c}_1(t)}{\Omega(t)} \text{erfi} [\text{erf}^{-1}(\bar{c}_2(t) + \bar{c}_1(t)\bar{r})] + \bar{c}_3(t), \end{aligned} \quad (87)$$

which are obtained by substituting the arbitrary complex functions $c_i(t)$ in place of the integration constant c_i and the arbitrary real function $\Omega(t)$ in place of the separation constant Ω . Hence, the general solution of the system (66) takes the form

$$\begin{aligned} u(t, x, y) &= h(t, r) + \bar{h}(t, \bar{r}), \\ v(t, x, y) &= i(h(t, r) - \bar{h}(t, \bar{r})), \\ \theta(t, x, y) &= \frac{1}{2} \arctan \left(i \frac{h^{(1)}(t, r) + \bar{h}^{(1)}(t, \bar{r})}{(h^{(1)}(t, r) - \bar{h}^{(1)}(t, \bar{r}))} \right), \\ \sigma(t, x, y) &= -\rho V(t, x, y) + \frac{1}{2} \sin(2\theta(t, x, y)) + \rho \frac{u(t, x, y)^2 + v(t, x, y)^2}{2} + \rho \int u_t(t, x, y) dx \\ &\quad + \int \theta_y(t, x, y) \sin(2\theta(t, x, y)) dx + \sigma_0(t), \end{aligned} \quad (88)$$

where the function h is defined by (87), $\bar{h}$ is its conjugate. Note that the solution (88) is a real solution.

Let us now consider the situation when Ω is identically equal to zero in the system of ODEs (80). This leads to two possible independent solutions for $h(r)$ depending on whether its second order derivative h_{rr}

vanishes or not. These solutions are respectively

$$\begin{aligned} (i) \quad & h(r) = c_1 r + c_2, & \text{if } h^{(2)} = 0, \\ (ii) \quad & h(r) = \frac{c_1}{r + c_2} + c_3, & \text{if } h^{(2)} \neq 0, \end{aligned} \quad (89)$$

and their complex conjugates, where the c_i are integration constant. Let us consider separately two cases: when the function h is given by (89.i) and when h is of the form (89.ii).

Case i. In this case, the real solution of the original system (66) takes the form

$$\begin{aligned} u(t, x, y) &= 4(\mathcal{R}e(c_1(t))x + \mathcal{I}m(c_1(t))y + \mathcal{R}e(c_2(t))), \\ v(t, x, y) &= 4(\mathcal{I}m(c_1(t))x - \mathcal{R}e(c_1(t))y + \mathcal{I}m(c_2(t))), \\ \theta(t, x, y) &= \begin{cases} -\frac{1}{2} \arctan\left(\frac{\mathcal{R}e(c_1(t))}{\mathcal{I}m(c_1(t))}\right), & \text{if } \mathcal{I}m(c_1(t)) \neq 0, \\ \frac{\pi}{4} & \text{if } \mathcal{I}m(c_1(t)) = 0, \end{cases} \\ \sigma(t, x, y) &= -\rho V(t, x, y) + \rho \left(2\|c_1(t)\|^2 + \mathcal{R}e(\dot{c}_1(t)) \right) x^2 - 2\rho \mathcal{I}m(\dot{c}_1(t)) xy \\ &\quad + \rho \left(2\|c_1(t)\|^2 - \mathcal{R}e(\dot{c}_1(t)) \right) y^2 + 2\rho (2\mathcal{R}e(c_1(t)\bar{c}_2(t)) + \mathcal{R}e(\dot{c}_2(t))) x \\ &\quad - 2\rho (2\mathcal{I}m(c_1(t)\bar{c}_2(t)) + \mathcal{I}m(\dot{c}_2(t))) y + \sigma_0(t), \end{aligned} \quad (90)$$

where the real function $\sigma_0(t)$ and the complex functions $c_1(t)$, $c_2(t)$ are arbitrary functions of time and $\dot{c}_1(t)$, $\dot{c}_2(t)$ their respective derivatives with respect to t . It should be noted that if the potential V , the real function $\sigma_0(t)$ and the complex functions $c_1(t)$, $c_2(t)$, are all bounded and are their derivatives $\dot{c}_1(t)$, $\dot{c}_2(t)$ are also bounded, then the solution (83) is bounded. Moreover, if we take these functions to be of the form

$$\sigma_0(t) = a_0 e^{-s_0 t}, \quad c_j(t) = a_j e^{-s_j t} + i b_j e^{-q_j t}, \quad j = 1, 2, \quad (91)$$

where $0 < q_j, s_j \in \mathbb{R}$, $a_j, b_j \in \mathbb{R}$, $j = 0, 1, 2$, then we obtain a damped solution. Another physically interesting situation occurs when the arbitrary functions $c_i(t)$ are constant in solution (83). In this case, we obtain a stationary solution for velocities u and v . This allows us to draw the shape of those extrusion dies which are admissible by requiring that the tool walls coincide with the lines of flow generated by the velocities u and v . This is necessary since we suppose that the flow is incompressible. From the practical point of view, it is convenient to press the plastic material through the die rectilinearly with constant speed. If we feed the die in this way, the plasticity region limits are curves defined by the ODE

$$\frac{dy}{dx} = \frac{V_0 - v(x, y)}{U_0 - u(x, y)}, \quad (92)$$

where U_0 and V_0 are constants representing the feeding velocity (or extraction velocity) of the die along the x -axis and y -axis respectively. Equation (92) is a consequence of the hypothesis that the flow is incompressible and the mass is conserved. This condition reduces to the boundary conditions described in [8] when we require that the limits of the plasticity region correspond to the slip lines (which correspond to the characteristic curves of the original system (66)), that is, when we require that $dy/dx = \tan \theta$ or $dy/dx = -\cot \theta$. Here, we use the weakened condition (92) because no constraints are imposed on

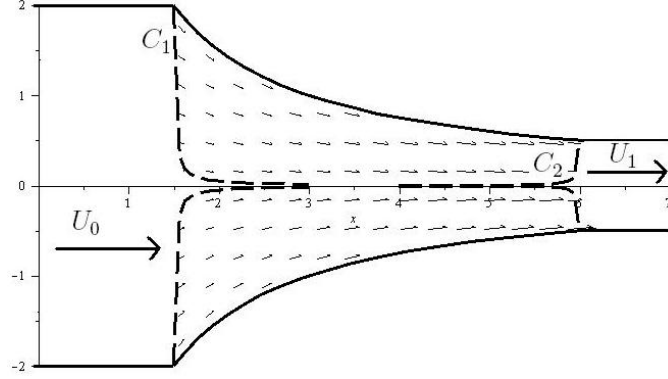


Figure 1: Extrusion die corresponding to the solution (83).

the flow lines which are in contact with the tool walls. This is so because, for a given solution and given parameters, we choose the walls of the extrusion die to lie along the flow lines. For the purpose of illustrating the applicability of the method, we have drawn in figure 1 the shape of a tool and the flow of matter inside the extrusion die for the following parameters : $\mathcal{R}e(c_1(t)) = 1$, $\mathcal{I}m(c_1(t)) = 0$, $\mathcal{R}e(c_2(t)) = 0$, $\mathcal{I}m(c_2(t)) = 0$. The feeding velocity of the tool is $U_0 = 5.95$, $V_0 = 0$ and the tool expels the matter at a velocity of $U_1 = 24.05$, $V_1 = 0$. The plasticity region at the opening is bounded by curve C_1 and at the exit by the curve C_2 . This extrusion die can thin a plate or rod of ideal plastic material.

Case ii. If h is defined by (82.ii), then the corresponding solution of system (66) takes the form

$$\begin{aligned}
 u(t, x, y) &= \mathcal{R}e(c_3(t)) + 2 \frac{\mathcal{R}e(c_1(t)\bar{c}_2(t)) + \mathcal{R}e(c_1(t))x + \mathcal{I}m(c_1(t))y}{x^2 + y^2 + 2(\mathcal{R}e(c_2(t))x + \mathcal{I}m(c_2(t))y) + \|c_2(t)\|^2}, \\
 v(t, x, y) &= \mathcal{R}e(c_3(t)) + 2 \frac{-\mathcal{I}m(c_1(t)\bar{c}_2(t)) - \mathcal{I}m(c_1(t))x + \mathcal{R}e(c_1(t))y}{x^2 + y^2 + 2(\mathcal{R}e(c_2(t))x + \mathcal{I}m(c_2(t))y) + \|c_2(t)\|^2}, \\
 \theta(t, x, y) &= -\frac{1}{2} \arctan \left(\left[-\mathcal{I}m(c_1(t))(x^2 - y^2) + 2\mathcal{R}e(c_1(t))xy \right. \right. \\
 &\quad + (-\mathcal{I}m(c_1(t)\bar{c}_2(t)) + \mathcal{R}e(c_1(t))\mathcal{R}e(c_2(t)) - \mathcal{I}m(c_1(t))\mathcal{R}e(c_2(t)))x \\
 &\quad + (\mathcal{R}e(c_1(t)\bar{c}_2(t)) + \mathcal{R}e(c_1(t))\mathcal{R}e(c_2(t)) + \mathcal{I}m(c_1(t))\mathcal{R}e(c_2(t)))y \\
 &\quad \left. \left. + \mathcal{R}e(c_1(t)\bar{c}_2(t))\mathcal{R}e(c_2(t)) + \mathcal{I}m(c_1(t)\bar{c}_2(t))\mathcal{I}m(c_2(t)) \right]^{-1} \right. \\
 &\quad \left[\mathcal{R}e(c_1(t))(x^2 - y^2) + 2\mathcal{I}m(c_1(t))xy \right. \\
 &\quad + (-\mathcal{R}e(c_1(t)\bar{c}_2(t)) + \mathcal{R}e(c_1(t))\mathcal{R}e(c_2(t)) + \mathcal{I}m(c_1(t))\mathcal{I}m(c_2(t)))x \\
 &\quad + (\mathcal{I}m(c_1(t)\bar{c}_2(t)) - \mathcal{R}e(c_1(t))\mathcal{I}m(c_2(t)) + \mathcal{I}m(c_1(t))\mathcal{R}e(c_2(t)))y \\
 &\quad \left. \left. + \mathcal{R}e(c_1(t)\bar{c}_2(t))\mathcal{R}e(c_2(t)) + \mathcal{I}m(c_1(t)\bar{c}_2(t))\mathcal{I}m(c_2(t)) \right] \right) \quad (93)
 \end{aligned}$$

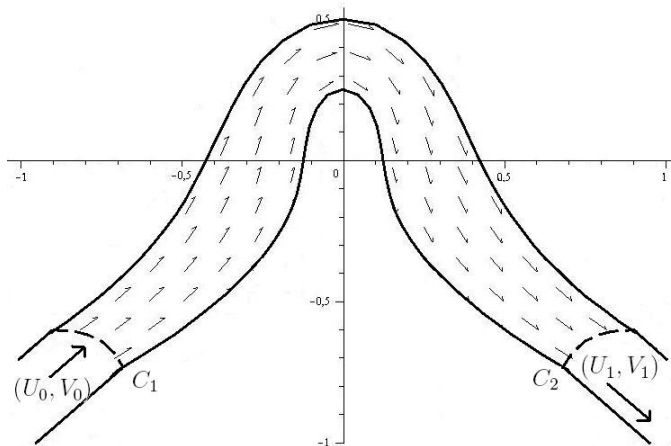


Figure 2: Extrusion die corresponding to the solution (85).

where the mean pressure σ is given by (68), where we substitute the values of functions u, v, θ given by (85). The complex functions $c_i(t)$, $i = 1, 2, 3$, and the real function $\sigma_0(t)$ which appear in this solution are arbitrary. For any time t_0 , solution (68), (93) has a singularity at point (x_0, y_0) which satisfies the equation

$$x_0^2 + y_0^2 + 2(\operatorname{Re}(c_2(t_0))x_0 + \operatorname{Im}(c_2(t_0))y_0) + |c_2(t_0)|^2 = 0.$$

This singularity is stationary at the origin if the function $c_2(t)$ is constant. Otherwise, its position varies with time. If the functions σ_0 and c_i , $i = 1, 2, 3$, are of the form (91) defined in a region of the xy -plane on a time interval $[T_0, T)$ where the gradient catastrophe does not occur, then the solution is bounded and damped. In figure 2, we have drawn the shape of an extrusion die corresponding to the solution (93) for the following choice of parameters: $\operatorname{Re}(c_1(t)) = 0$, $\operatorname{Im}(c_1(t)) = 0$, $\operatorname{Re}(c_2(t)) = 0$, $\operatorname{Im}(c_2(t)) = -0.5$, $\operatorname{Re}(c_3(t)) = -0.5$ and $\operatorname{Im}(c_3(t)) = 0$. The feeding velocity has component $U_0 = 0.2$, $V_0 = 0.2$, and the extraction of material is performed at the velocity $U_1 = 0.2$, $V_1 = -0.2$. This type of tool can be used to bend a rod by extrusion without having to fold it.

Finally, we should emphasize that the flow changes considerably when the parameters are varied and we have the freedom to choose the walls of the tool among the flow lines for certain fixed parameters $c_i(t)$. Moreover, the velocity and the orientation of the feeding (extraction) can vary somewhat for a given shape of the tool. Consequently, many types of extrusion dies can be drawn.

5 Final remarks.

The generalized method of characteristics was originally devised for solving first-order quasilinear hyperbolic systems. The proposed technique allows us to extend the applicability of this approach not only to hyperbolic systems but also to encompass elliptic and mixed (parabolic) type systems. A variant of the conditional symmetry method for obtaining multimode solutions has been proposed for these types of systems. We have demonstrated the usefulness of this approach through several examples of

the ideal plasticity in $(2 + 1)$ dimensions. New classes of real solutions have been constructed in closed form, some of them bounded. Some of the obtained solutions have a stationary flow for an appropriate choice of parameters $c_i(t)$. For these solutions, we have drawn extrusion dies and the vector fields which define the flow inside a region where the gradient catastrophe does not occur. The proposed approach for constructing multimode solutions can be used in several potential applications arising from systems describing nonlinear phenomena in physics or in theoretical chemistry and biology. It should be noted that in the multidimensional case for many physical models there are very few known examples of multimode solutions. The approach proposed in this paper offers a new and promising way to construct and investigate such types of solutions. This makes our approach attractive since it can widen the potential range of applications leading to more diverse types of solutions. This task will be undertaken in a future work.

Acknowledgements

This work was supported by a research grant from the Natural Sciences and Engineering Council of Canada (NSERC).

References

- [1] M.J. Ablowitz, P.A. Clarkson. *Solitons, Nonlinear evolution equations and inverse scattering*. London Math.Soc. Lecture note ser 149, Cambrige Univ. Press. 1992.
- [2] G. Boillat *Sur la propagation des ondes..* Gauthier-Villars, Paris, 1965
- [3] M. Burnat. The method of Riemann invariants and its applications to the theory of plasticity, *Com. Arch. Mech. Stos.*, part 1, 26, 6, 1974, 817-838 and part 2, 24, 1, 1972, 3-26.
- [4] E. Cartan. *Sur la structure des groupes infinis de transformations..* Chapt. 1: Les systèmes différentielles en involution, Gauthier-Villars, Paris, 1953.
- [5] J. Chakrabarty. *Theory of Plasticity*. Elsevier, 2006.
- [6] R. Conte, A.M. Grundland, B. Huard Elliptic solutions of isentropic ideal compressible fluid flow in $(3 + 1)$ dimensions. *J. Phys. A*, Math. Theor. 42, 135203, (2009) (14pp)
- [7] R. Courant, D. Hilbert *Methods of mathematical physics. vol 1 and 2*. Interscience, New-York, 1962
- [8] J. Czyz. Construction of a flow of an ideal plastic material in a die, on the basis of the method of Riemann invariants. *Archives of Mechanics*, 26(4):589–616, 1974.
- [9] P.W. Doyle, A.M. Grundland. Simple waves and invariant solutions of quasilinear systems, *J. Math. Phys.*, 37, 6, 1996, 2969-2979.
- [10] B.A. Dubrovin and S.P. Novikov. Hamiltonnian formalism of one-dimensional systems of hydrodynamic type, *Sov. Math. Dokl.*, 27, 1983, 665-669.
- [11] E.V. Ferapontov, K.R. Khusnutdinova. On the integrability of $(2 + 1)$ dimensional quasilinear systems, *Com. Math. Phys.*, 248, 2004, 187-206.

- [12] E.V. Ferapontov, K.R. Khusnutdinova. The characterization of two-component (2+1)-dimensional integrable systems of hydrodynamic type, *J. Phys. A: Math. Gen.*, 37, 2004, 2949-2963.
- [13] W. Fushchych. Conditional symmetry of equations of mathematical Physics, *Ukrain Math. J.*, 43, 1991, 1456-1470
- [14] A.M. Grundland. Riemann invariants for nonhomogeneous systems of quasilinear partial differential equations, *Com. Bull. Acad. Polon. Sci., Ser Sci Techn* 22, 1974, 273-282.
- [15] A.M. Grundland, B. Huard Riemann invariants and rank- k solutions of hyperbolic systems. *J. Nonlin. Math. Phys.*, 13, 3, (2006) 393-419
- [16] A.M. Grundland, B. Huard Conditional symmetries and Riemann invariants for hyperbolic systems of PDEs. *J. Phys. A, Math. Theor.* 40:4093-4123, 2007.
- [17] A.M. Grundland, J. Tafel. Symmetry reduction and Riemann wave solutions, *J. Math. Anal. Appl.*, 198, 1996, 879-892.
- [18] A.M. Grundland, P. Vassiliou, On the solvability of the Cauchy problem for the Riemann double waves by the Monge-Darboux method. *Analysis* 11, (2009) 221-278
- [19] A.M. Grundland, R. Zelazny, Simple waves in quasilinear systems, Part I and Part II. *J. Math. Phys.*, 24, 9, 2305-2329, 1983.
- [20] R. Hill. *The Mathematical Theory of plasticity*. Oxford University press, 1998.
- [21] A. Jeffrey, *Quasilinear hyperbolic systems and wave propagation*. Pitman Publ., 1976.
- [22] F. John, S. Klainerman. Almost global existence of nonlinear wave equations in three space dimensions, *Com. Pure and Appl. Math.*, 37, 1984, 443-455.
- [23] E. Kamke. *Differentialgleichungen. Lösungsmethoden und Löseungen*, I B.G. Teubner Stuttgart, 1983.
- [24] L. Katchanov. *Éléments de la théorie de la plasticité*. Éditions Mir, Moscou, 1975.
- [25] M. Kuranishi. *Lectures on involutive systems of partial differential equations*. Publ. Brasil Math. Soc., Sao Paulo, 1967.
- [26] R. Mises, *Mathematical theory of compressible fluid flow*. Acad. Press, New-York, 1958.
- [27] P.J. Olver. *Applications of Lie Groups to Differential Equations*. Springer-Verlag, New-York, 1986.
- [28] P.J. Olver, E. Vorobev. *Nonclassical and conditional symmetries*. Hankbook of Lie group analysis, Ed. N. Ibragimov, vol.3 chapt., 11 CRC Press, London, 1995
- [29] Z. Peradzynski Geometry of interactions of Riemann waves *Avances in nonlinear waves vol. 2*, Ed. Debnath, Research notes in mathematics no 111, Pitman Avanced Publ. Boston, 1985.
- [30] B.L. Rozdestvenski, N.N. Janenko, Systems of Quasilinear Equations and their Applications to Gas Dynamics. *Transl. Math. Monographs*, vol. 55, AMS Providence 1983

- [31] S. Sobolev. Functionally invariant solutions of wave equations. *Trudy phys. math. Inst. Steklova (in Russian)*, 5, 1934, 259-264
- [32] G.B. Whitham. *Linear and nonlinear waves*. John-wiley Publ, New-York, 1974.
- [33] V. Zakharov. *Nonlinear waves weak turbulence*. in serie Advances of Modern Mathematics, 1998.